

THIS REPORT HAS BEEN DELIMITED
AND CLEARED FOR PUBLIC RELEASE
UNDER DOD DIRECTIVE 5200.20 AND
NO RESTRICTIONS ARE IMPOSED UPON
ITS USE AND DISCLOSURE.

DISTRIBUTION STATEMENT A

APPROVED FOR PUBLIC RELEASE;
DISTRIBUTION UNLIMITED.

med Services Technical Information Agency

Because of our limited supply, you are requested to return this copy WHEN IT HAS SERVED YOUR PURPOSE so that it may be made available to other requesters. Your cooperation will be appreciated.

D 36772

NOTE: WHEN GOVERNMENT OR OTHER DRAWINGS, SPECIFICATIONS OR OTHER DATA IS USED FOR ANY PURPOSE OTHER THAN IN CONNECTION WITH A DEFINITELY RELATED GOVERNMENT PROCUREMENT OPERATION, THE U. S. GOVERNMENT THEREBY INCURS NO RESPONSIBILITY, NOR ANY OBLIGATION WHATSOEVER; AND THE FACT THAT THE GOVERNMENT MAY HAVE FORMULATED, FURNISHED, OR IN ANY WAY SUPPLIED THE DRAWINGS, SPECIFICATIONS, OR OTHER DATA IS NOT TO BE REGARDED BY ANY PERSON OR CORPORATION, OR CONVEYING ANY RIGHTS OR PERMISSION TO MANUFACTURE, OR SELL ANY PATENTED INVENTION THAT MAY IN ANY WAY BE RELATED THERETO.

Reproduced by
DOCUMENT SERVICE CENTER
KNOTT BUILDING, DAYTON, 2, OHIO

UNCLASSIFIED

DEPARTMENT OF OCEANOGRAPHY UNIVERSITY OF WASHINGTON

AD No. 36772
ASTIA FILE COPY

Technical Report No. 32
**A PRECISION WATER LEVEL RECORDER
FOR
SMALL-SCALE HYDRAULIC MODELS**

Office of Naval Research
Contract N8onr-520/M
Project NR 083 012

Reference 54-18
May 1954



SEATTLE 5, WASHINGTON

UNIVERSITY OF WASHINGTON DEPARTMENT OF OCEANOGRAPHY
(Formerly Oceanographic Laboratories)
Seattle, Washington

A PRECISION WATER LEVEL RECORDER
FOR
SMALL-SCALE HYDRAULIC MODELS


by

Robert G. Paquette and John H. Lincoln

Technical Report No. 32

Office of Naval Research
Contract N8onr-520/III
Project NR 63 012

Reference 54-18
May 1954


Richard H. Fleming
Executive Officer

SUMMARY

A water-level recorder with a linear scale, a precision of ± 0.002 inch, and a range of 0.4 inch is described. The position of a reciprocating fine wire probe is recorded once each second on a magnified scale at the instant the probe touches the water surface. Electrosensitive paper is used. The device was developed as a tide recorder in a small-scale hydraulic model of Puget Sound.

INTRODUCTION

A portable recording tide gauge has been constructed for use in an hydraulic model of Puget Sound. The requirements which have been met are a precision of ± 0.002 inch in water level, and a range of 0.2 inch, which correspond to ± 0.2 foot and 20 feet respectively in the prototype. The physical dimensions of the sensitive element are extremely small so as to provide a minimum disturbance to flow. This is desirable since the horizontal scale of the model is 1:40000 and one inch represents 0.55 nautical miles in nature.

Water-level recorders based on various principles have been described but most of them are not adaptable to measurement with the required precision. Because of the variable effect of surface tension, devices using floats are excluded. Probes varying in conductance with depth of immersion are excluded for the same reason and also because of the fact that water of varying salinity will be present in the model. Devices depending upon the capacitance between a condenser plate and the water surface are undesirable because of the short working distance required for sufficient sensitivity, the non-linear change of capacitance with spacing and the fact that the effective position of the virtual condenser plate in the water is not precisely at the surface but some distance below, depending upon the conductance of the water. J. Valenbois (1) has reported a device that is suitable in principle but not precisely linear and of limited range. It depends upon automatically recording a measure of the fractional time that a rapidly oscillating wire probe,

breaking the surface, is immersed.

Design and Construction

In principle, the device consists of a lever with the pivot so placed that the motions of the two ends are approximately in the ratio of 1:12. The short end moves a fine platinum wire vertically so as to dip it into the water with a continual reciprocating motion. The instant of contact with the water is detected electrically and transformed into a pulse which makes a mark on electrosensitive paper being moved past a scribe on the long end. Thus the motions of the water surface are magnified twelve times and recorded. Electronically it is essentially a capacitor discharge controlled by a self-quenching thyatron circuit, quenching being accomplished by means of the negative swing in plate voltage produced by inductance L. The relative values of components in this circuit are fairly critical. The design of the input circuit is based on the fact that contact of the probe with tap water produces practically instantaneously a conductance of about 2 micromhos, and is designed with time constant short enough so that the grid will always be below the firing potential before the plate is driven negative. The circuit is designed to be triggered once each second and to record on Teledeltos* chart paper. The principle of the instrument is illustrated in Figure 1.

The details of construction are shown in Figure 2. The device is constructed around a standard Esterline-Angus chart drive which is mounted on a frame of aluminum angle. The assembly of lever, pivot,

*Western Union Telegraph Co.

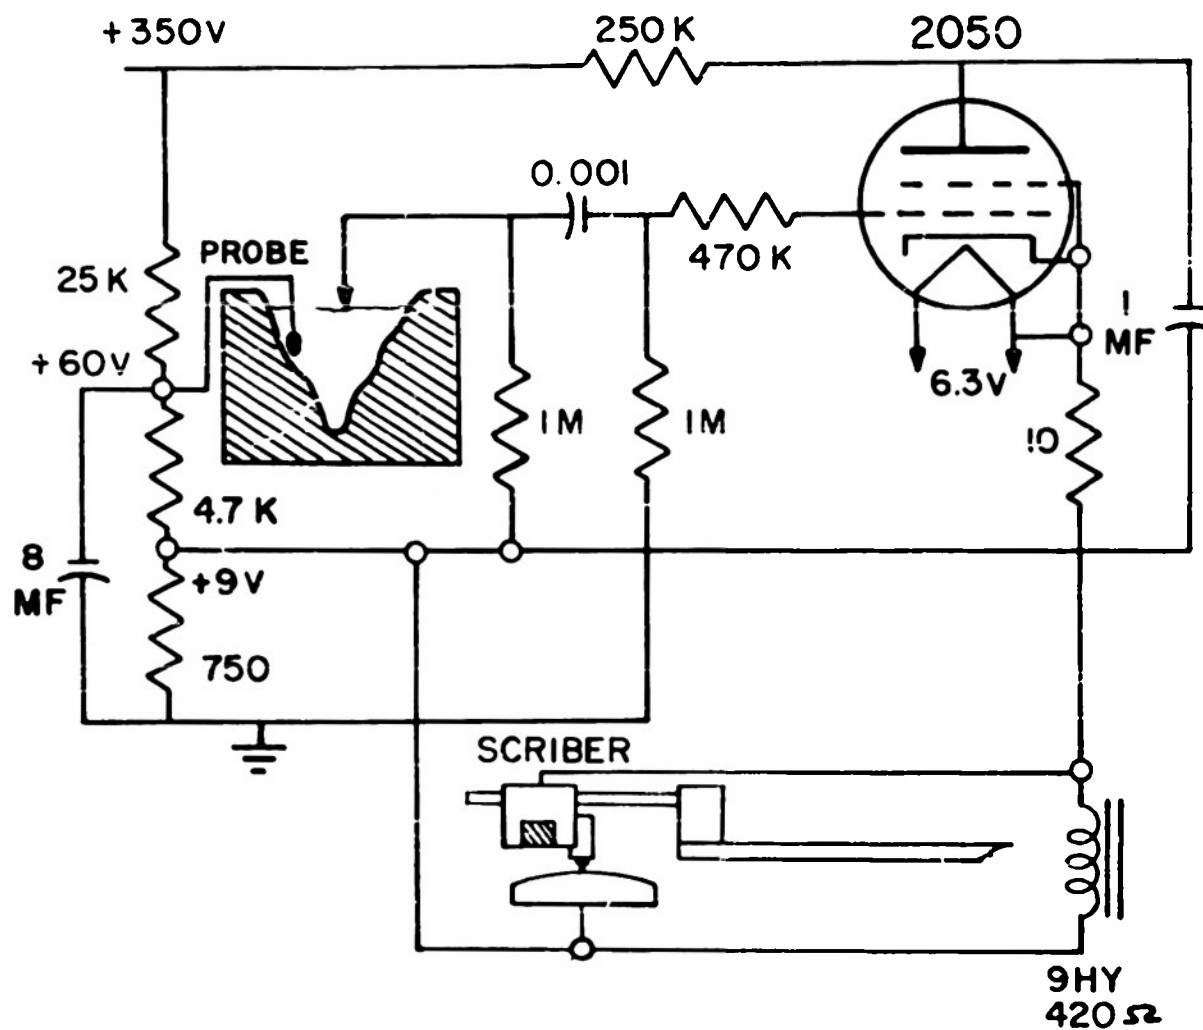


FIGURE 1. Circuit of Micro Tide Recorder

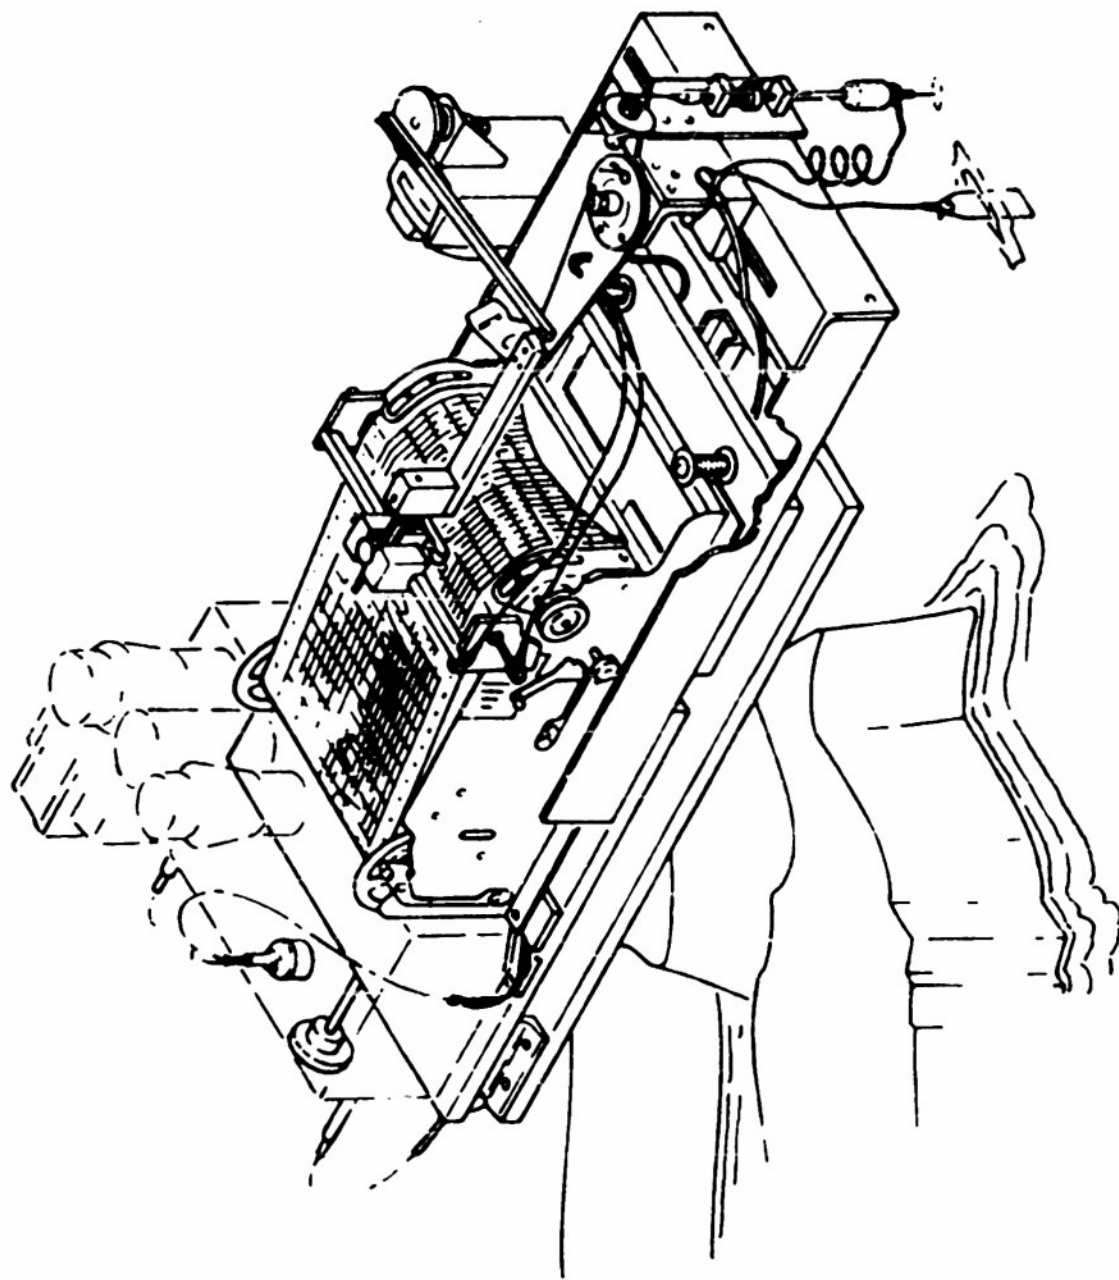


FIGURE 2. Micro Slide Recorder

and probe is mounted on the forward end of the frame which can be cantilevered approximately 12 inches outward from the shoreline of the model, if desired. This assembly can be adjusted laterally along a slotted bar where it is held in position by a wing nut. This permits making gross adjustments of the position of the trace on the chart paper. Several traces may then be placed side by side on one section of chart. The linkage between the driving motor and the lever is also adjustable in length to correspond.

The horizontal movement of the lever is transformed into the vertical motion of the probe by means of radio dial cable extending from a grooved wheel on the lever pivot and over a pulley to the top of the probe rod. The probe rod is driven downward by a spring. A piece of No. 26 platinum wire is mounted at the end of the probe rod in an insulating bushing.

A synchronous gearhead motor produces the reciprocating motion of the lever by means of a crank pin which is linked to the lever by a bar. The radius of motion of the crankpin is made adjustable to regulate the length of stroke. The probe is dipped once each second, which corresponds to one measurement every twenty minutes in nature.

The motion of the long end of the lever is made rectilinear by means of a grooved metal block sliding on an insulated, square, metal bar and driven through a linkage free to rotate and slide. The sliding block carries the recording electrode which is a piece of No. 20 tungsten wire mounted vertically in a strip of spring phosphor bronze. The opposing electrode beneath the electrosensitive paper is a flat bar extending across the paper.

The entire assembly is mounted on a base which consists of two pieces of plywood hinged together at the back. The separation of the two pieces may be precisely adjusted by means of a screw-driven wedge, thus permitting minute adjustment of the height above the water and the position of the trace on the chart. One turn of the screw corresponds to one foot of tide and so provides a ready means of calibration.

Chart paper for the device is that used for the Navy Type NMC fathomster made by the Radic Corporation of America. This fits the Esterline-Angus chart drive, has uniform transverse divisions, and so is very well suited to the purpose. A typical record is shown in Figure 3. Here a tide record has been made for three places in the model with the same input from the tide machine and on the same time scale. The manner in which the tidal wave is modified as it proceeds south is clearly demonstrated.

The model of Puget Sound is built with a flat top about $1\frac{1}{2}$ inches above the water line. The recorder can, therefore, be placed at any point desired. Adjustments for the desired placement of the trace on the chart are quickly made, the power to the trigger circuit is turned on and a few seconds later the motor is started and the recording begins.

The equipment has been operated on a number of occasions, totaling over 75 hours, and has proved very satisfactory. A precision of ± 0.002 inch is attained.

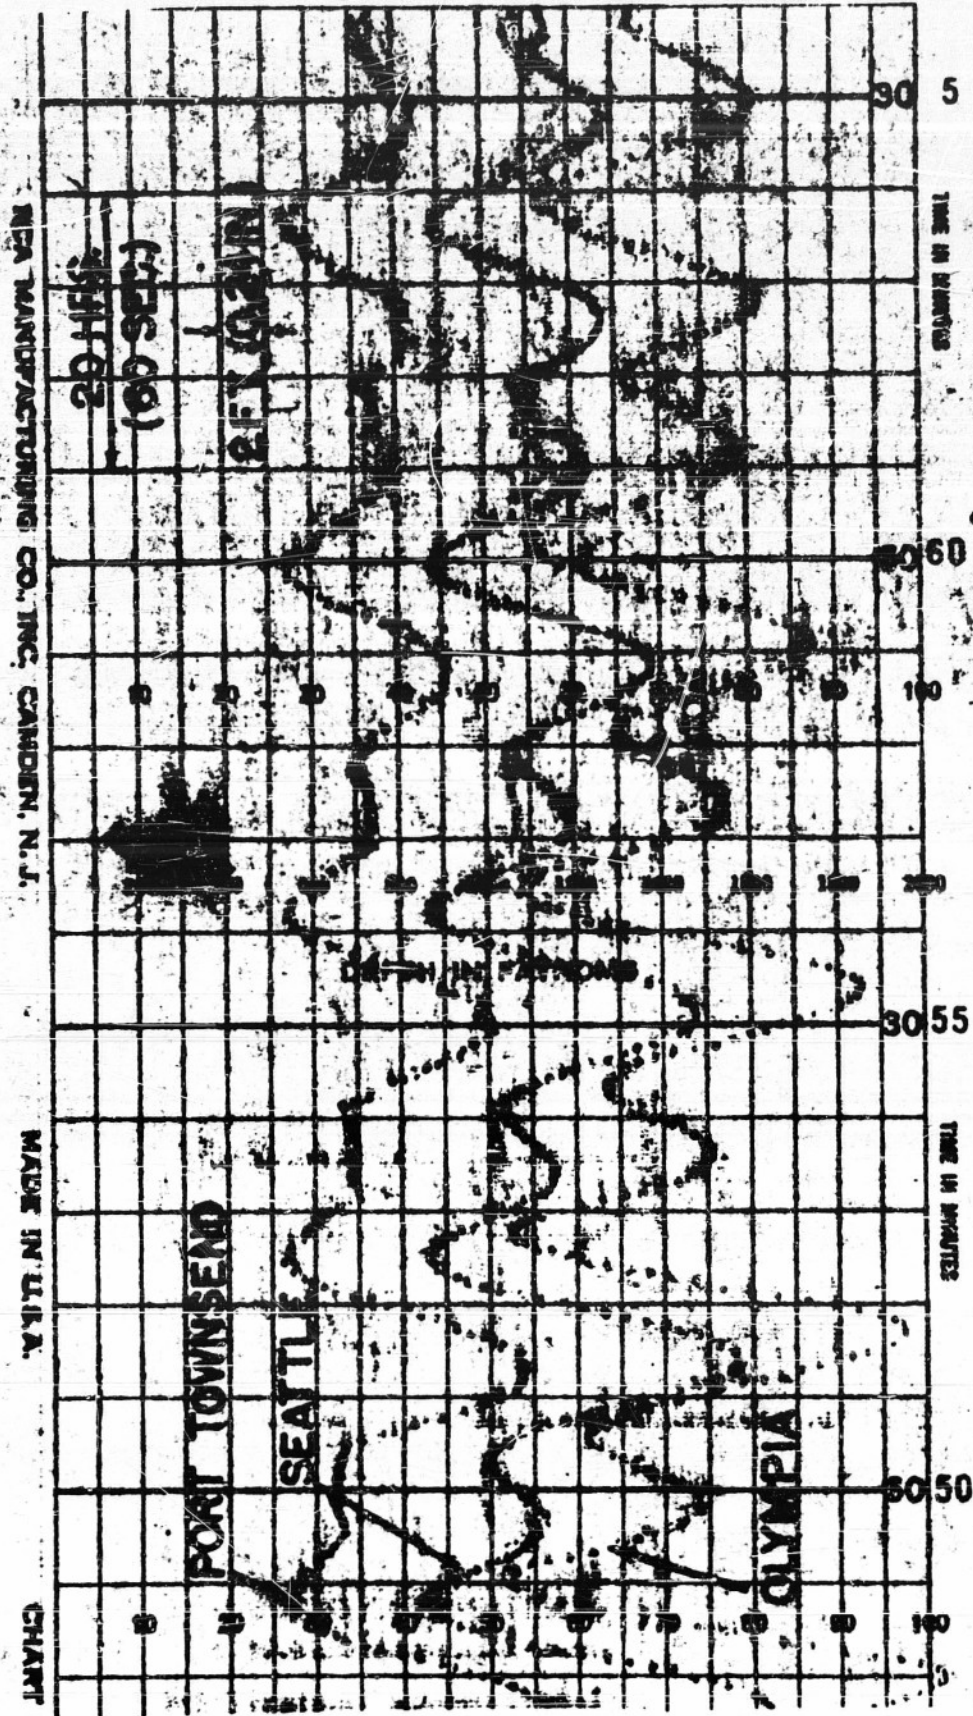


FIGURE 3. An example of tidal modification at three different places in the model, progressing from north to south.

REFERENCES

- (1) Valenbois, J.
1951. Methods Used at the Laboratoire Nationale D'Hydraulique De Chatou for the Measurement and Recording of Gravity Waves in Models. Proceedings of the NBS Semicentennial Symposium on Gravity Waves Held at NBS on June 18-20, 1951, National Bureau of Standards Circular 521 (Nov. 28, 1952). (Superintendent of Documents, Washington, D. C., \$1.75).

Department of Oceanography
University of Washington
Technical Report Distribution List

- | | | |
|---|---|--|
| 2 Geophysics Branch, (Code 416)
Office of Naval Research
Washington 25, D.C. | 1 Chief of Naval Research
Navy Department
Washington 25, D.C.
Attention: (Code 466) | 1 Director, Chesapeake Bay Institute
Box 4264, RFD #2
Annapolis, Maryland |
| 6 Director, Naval Research Laboratory
Attention: Technical Information
Officer
Washington 25, D.C. | 8 U.S. Navy Hydrographic Office
Washington 25, D.C.
Attention: Division of Oceanography | 1 Director, Narragansett Marine
Laboratory
Kingston, R. I. |
| 2 Officer-in-Charge
Office of Naval Research
London Branch Office
Navy #100, Fleet Post Office
New York, New York | 2 Director, U.S. Navy Electronics
Laboratory
San Diego 52, California
Attention: (Codes 550, 552) | 1 Head, Department of Oceanography
University of Washington
Seattle, Washington |
| 1 Office of Naval Research Branch
Office
346 Broadway
New York 13, New York | 1 Chief, Bureau of Yards and Docks
Navy Department
Washington 25, D.C. | 1 Bingham Oceanographic Foundation
Yale University
New Haven, Connecticut |
| 1 Office of Naval Research Branch
Office
Tenth Floor, The John Crerar Library
Building
86 East Randolph Street
Chicago, Illinois | 1 Commanding General, Research and
Development Division
Department of the Army
Washington 25, D.C. | 1 Department of Conservation
Cornell University
Ithaca, New York
Attention: Dr. J. Ayers |
| 1 Office of Naval Research Branch
Office
1030 East Green Street
Pasadena 1, California | 1 Commanding Officer, Cambridge Field
Station
230 Albany Street
Cambridge 39, Massachusetts
Attention: CRBSL | 1 Director, Lamont Geological
Observatory
Torrey Cliff
Palisades, New York |
| 1 Office of Naval Research Branch
Office
1000 Geary Street
San Francisco, California | 1 National Research Council
2101 Constitution Avenue
Washington 25, D.C.
Attention: Committee on Undersea
Warfare | 2 Director, U.S. Fish & Wildlife
Service
Department of the Interior
Washington 25, D.C.
Attention: Dr. L. A. Walford |
| 1 Office of Technical Services
Department of Commerce
Washington 25, D.C. | 1 Project Arowa
U.S. Naval Air Station
Building R-48
Norfolk, Virginia | 1 U.S. Army Beach Erosion Board
5201 Little Falls Road N. W.
Washington 16, D.C. |
| 5 Armed Services Technical Information
Center
Documents Service Center
Knott Building
Dayton 2, Ohio | 1 Department of Aerology
U.S. Naval Post Graduate School
Monterey, California | 1 Allen Hancock Foundation
University of Southern California
Los Angeles 7, California |
| 1 Assistant Secretary of Defense for
Research & Development
Attention: Committee on Geophysics
and Geography
Pentagon Building
Washington 25, D.C. | 1 Chief of Naval Operations
Navy Department
Washington 25, D.C.
Attention: Op-533D | 1 U.S. Fish & Wildlife Service
Fort Crockett
Galveston, Texas |
| 1 Office of Naval Research Resident
Representative
University of Washington
Seattle 5, Washington | 1 Commandant (CAO), U.S. Coast Guard
Washington 25, D.C. | 1 U.S. Fish & Wildlife Service
450 B Jordan Hall
Stanford University
Stanford, California |
| 2 Assistant Naval Attache for Research
American Embassy
Navy #100, Fleet Post Office
New York, New York | 1 Director, U.S. Coast & Geodetic
Survey
Department of Commerce
Washington 25, D.C. | 2 Director, Scripps Institution of
Oceanography
La Jolla, California |
| 2 Chief, Bureau of Ships
Navy Department
Washington 25, D.C.
Attention: (Code 847) | 1 Department of Engineering
University of California
Berkeley, California | 1 Director, Hawaii Marine Laboratory
University of Hawaii
Honolulu, T. H. |
| 1 Commander, Naval Ordnance Laboratory
White Oak
Silver Spring 19, Maryland | 1 The Oceanographic Institute
Florida State University
Tallahassee, Florida | 1 Director, Marine Laboratory
University of Miami
Coral Gables, Florida |
| 1 Commanding General, Research and
Development Division
Department of the Air Force
Washington 25, D.C. | 1 U.S. Fish & Wildlife Service
P.O. Box 3830
Honolulu, T. H. | 2 Head, Department of Oceanography
Texas A & M College
College Station, Texas |
| | 1 U.S. Fish & Wildlife Service
Woods Hole, Massachusetts | 1 Head, Department of Oceanography
Brown University
Providence, Rhode Island |
| | 2 Director, Woods Hole Oceanographic
Institution
Woods Hole, Massachusetts | 1 Department of Zoology
Rutgers University
New Brunswick, New Jersey
Attention: Dr. H. K. Haskins |
| | | 1 Dr. Willard J. Pierson
New York University
New York, New York |
| | | 1 Librarian
California Fisheries Laboratory
Terminal Island Station
San Pedro, California |

Distribution List (Continued)

Chief of Naval Research, Navy Department, Washington 25, D. C., Attention: Code 446	1
Director, National Institute of Oceanography, Wormley, Near Godalming, Surrey, England	1
Director, Bermuda Biological Station for Research, St. George's, Bermuda	1
Project Officer, Laboratory of Oceanography, Woods Hole, Massachusetts	1
Institute of Oceanography, University of British Columbia, Vancouver, Canada	1
Pacific Oceanographic Group, c/o Pacific Biological Station, Nanaimo, British Columbia, Canada	1
Dr. F. Møller, Norwegian Defense Research Institute, Akershus, Oslo, Norway	1

Armed Services Technical Information Agency

Because of our limited supply, you are requested to return this copy WHEN IT HAS SERVED YOUR PURPOSE so that it may be made available to other requesters. Your cooperation will be appreciated.

AD

36772

NOTICE: WHEN GOVERNMENT OR OTHER DRAWINGS, SPECIFICATIONS OR OTHER DATA ARE USED FOR ANY PURPOSE OTHER THAN IN CONNECTION WITH A DEFINITELY RELATED GOVERNMENT PROCUREMENT OPERATION, THE U. S. GOVERNMENT THEREBY INCURS NO RESPONSIBILITY, NOR ANY OBLIGATION WHATSOEVER; AND THE FACT THAT THE GOVERNMENT MAY HAVE FORMULATED, FURNISHED, OR IN ANY WAY SUPPLIED THE SAID DRAWINGS, SPECIFICATIONS, OR OTHER DATA IS NOT TO BE REGARDED BY IMPLICATION OR OTHERWISE AS IN ANY MANNER LICENSING THE HOLDER OR ANY OTHER PERSON OR CORPORATION, OR CONVEYING ANY RIGHTS OR PERMISSION TO MANUFACTURE, USE OR SELL ANY PATENTED INVENTION THAT MAY IN ANY WAY BE RELATED THERETO.

Reproduced by
DOCUMENT SERVICE CENTER
KNOTT BUILDING, DAYTON, 2, OHIO

UNCLASSIFIED